



Personal Catchfan


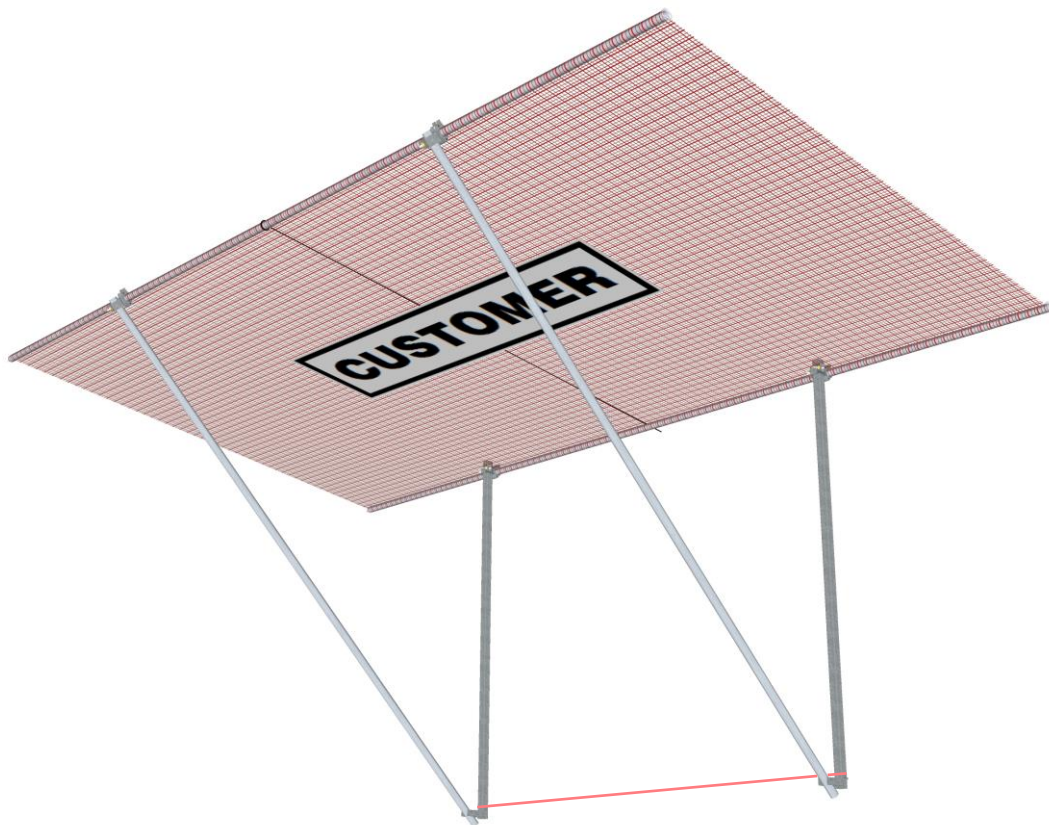


General Information

- Work safe
- Follow the instructions
- Installation by adept or trained worker
- Consider using the planning, training and installation service from Tammet Oy
- Prepare a rescue plan how to rescue a person from the catchfan

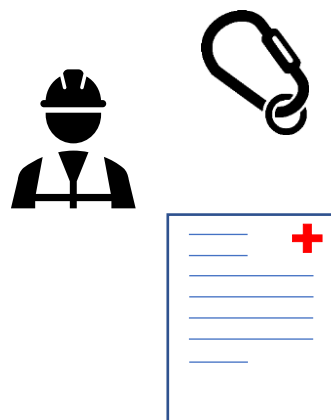


- Check the distances and heights for the whole installation
- Prepare a project plan for the catchfan position and installation type (attachment version)
- Consider using the project planning service from Tammet Oy

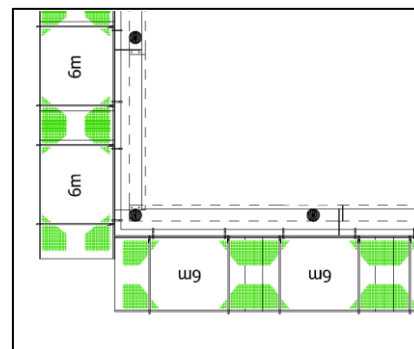

General Information

- Fold the catchfan in, in case of strong wind load or snowfall
- Keep the catchfan clean from material

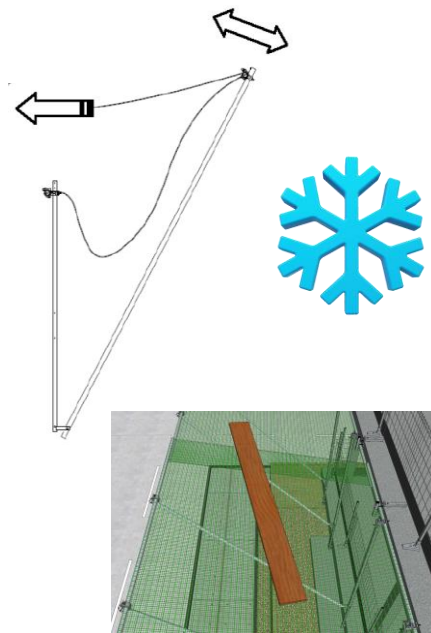


- Inspect the catchfan before every use
- Change deformed or broken parts
- Test the soft net every 12 month with the test stripes
- Use the Tammet Oy service for the test stripe test or another certified institute




General Information


- Install the catchfan as close as possible below the working area to reduce the falling height and the risk of injury
- Max. height between catchfan & working area is 3m for an inclining roof with more than 20° and 6m for inclining roof less than 20°
- Use all possible equipment to prevent somebody from falling
- Tammet Oy can also provide you with other Products & services to prevent accidents, such as edge protection barrier systems.

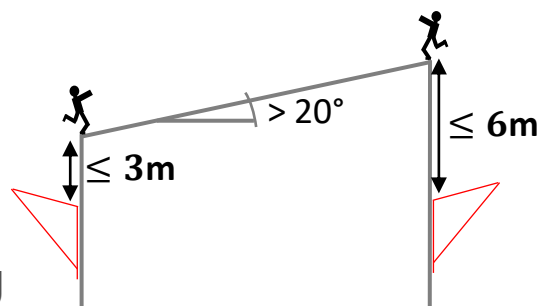


Item Overview

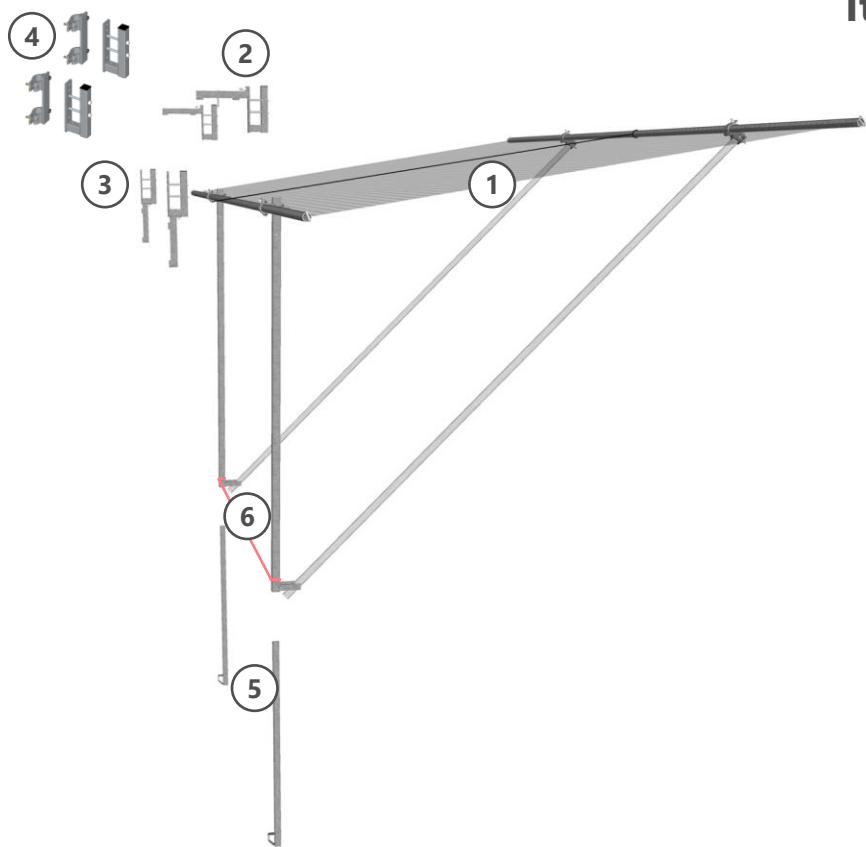


Catch Fan 4 m

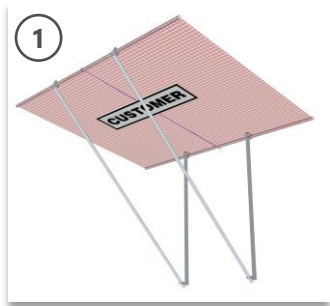


Catch Fan 6 m

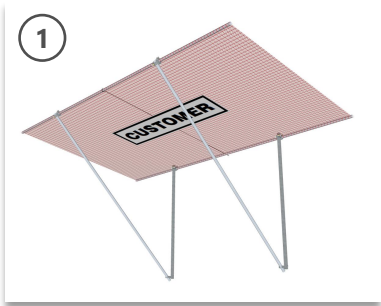


Slab Fix




Wall Fix




Scaffold Fix



Extension




Body Tube Strap




Catchfan 6 m

Art.-Nr.: 2079621-6
77 kg

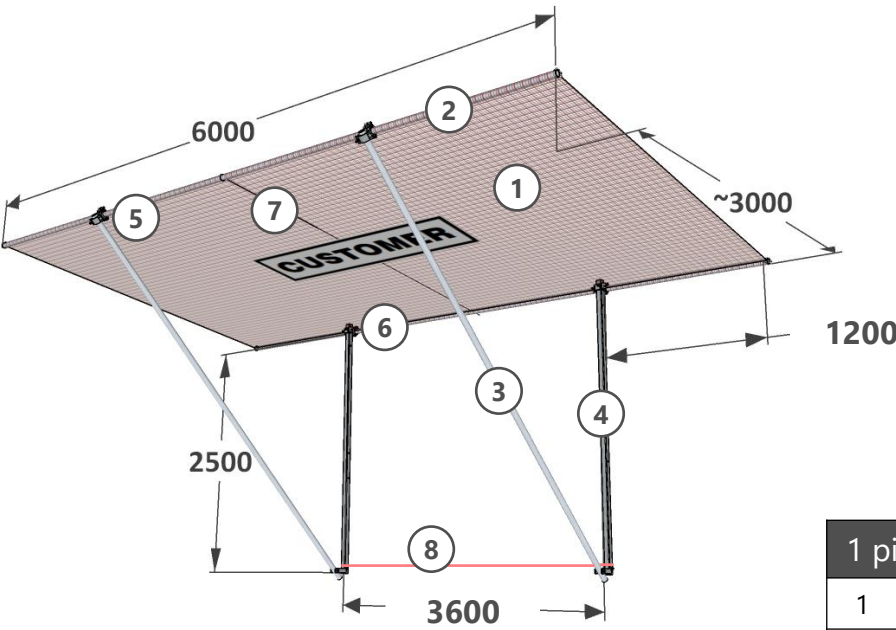


[mm]

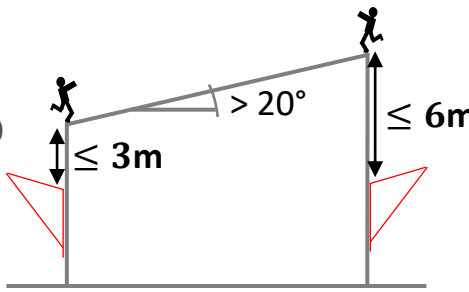

1 piece catchfan 6 m consist of:



1	1 pcs	Net 6 m
2	2 pcs	Round Tube 6 m
3	2 pcs	Round Tube vertical
4	2 pcs	Square Tube 2500
5	2 pcs	Coupler round-round
6	2 pcs	Coupler round-square
7	1 pcs	Pull-in-rope
8	1 pcs	Body tube strap

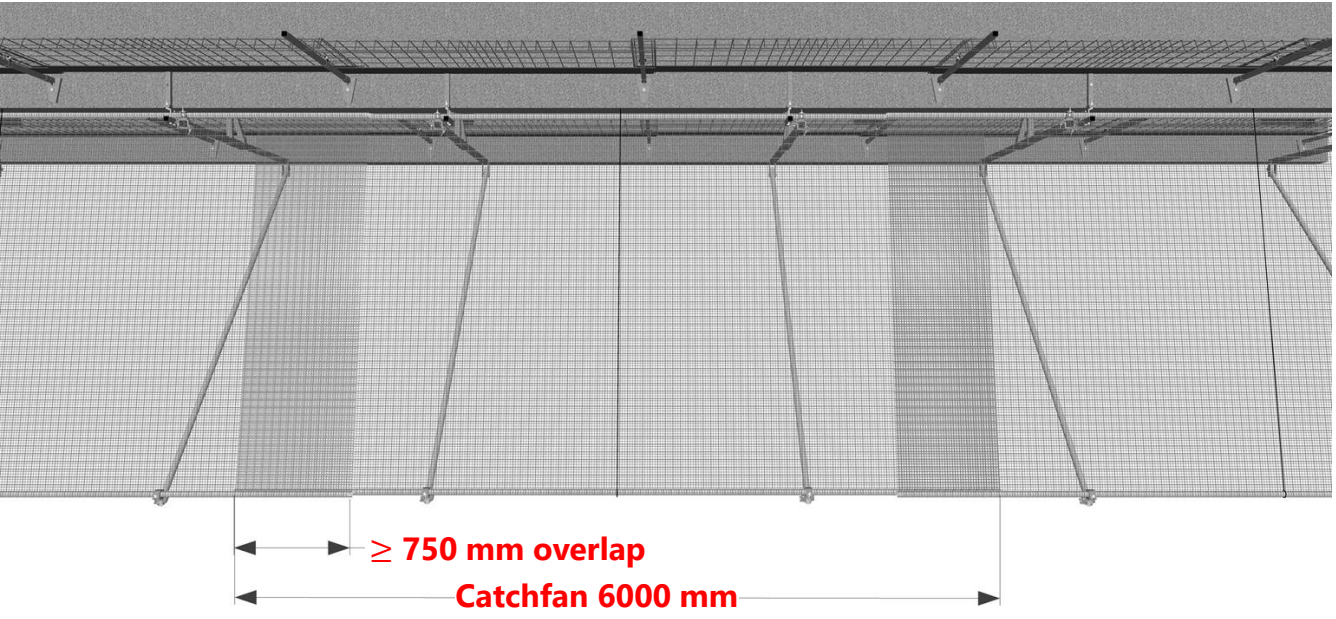

≥ 750 mm overlap
Catchfan 6000 mm


Catchfan 4 m

Art.-Nr.: 2079621-4
67 kg

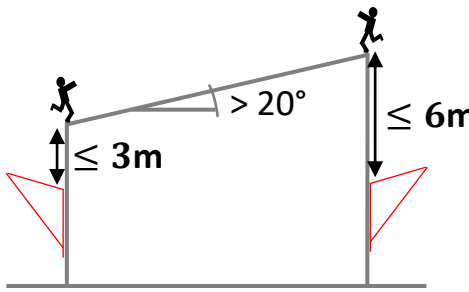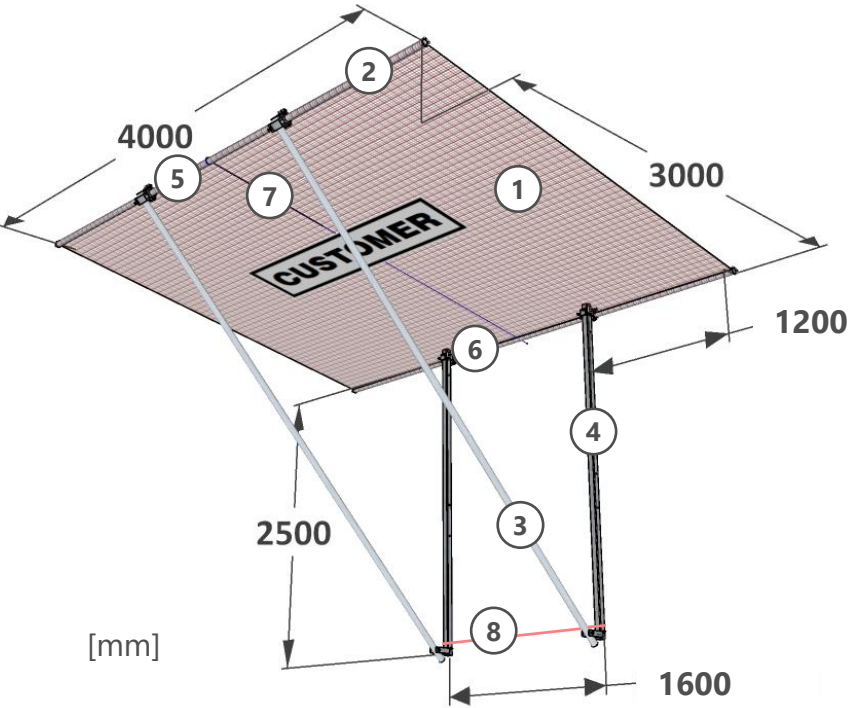





1 piece catchfan 4 m consist of:

1	1 pcs	Net 4 m
2	2 pcs	Round Tube 4 m
3	2 pcs	Round Tube vertical
4	2 pcs	Square Tube 2500
5	2 pcs	Coupler round-round
6	2 pcs	Coupler round-square
7	1 pcs	Pull-in-rope
8	1 pcs	Body tube strap

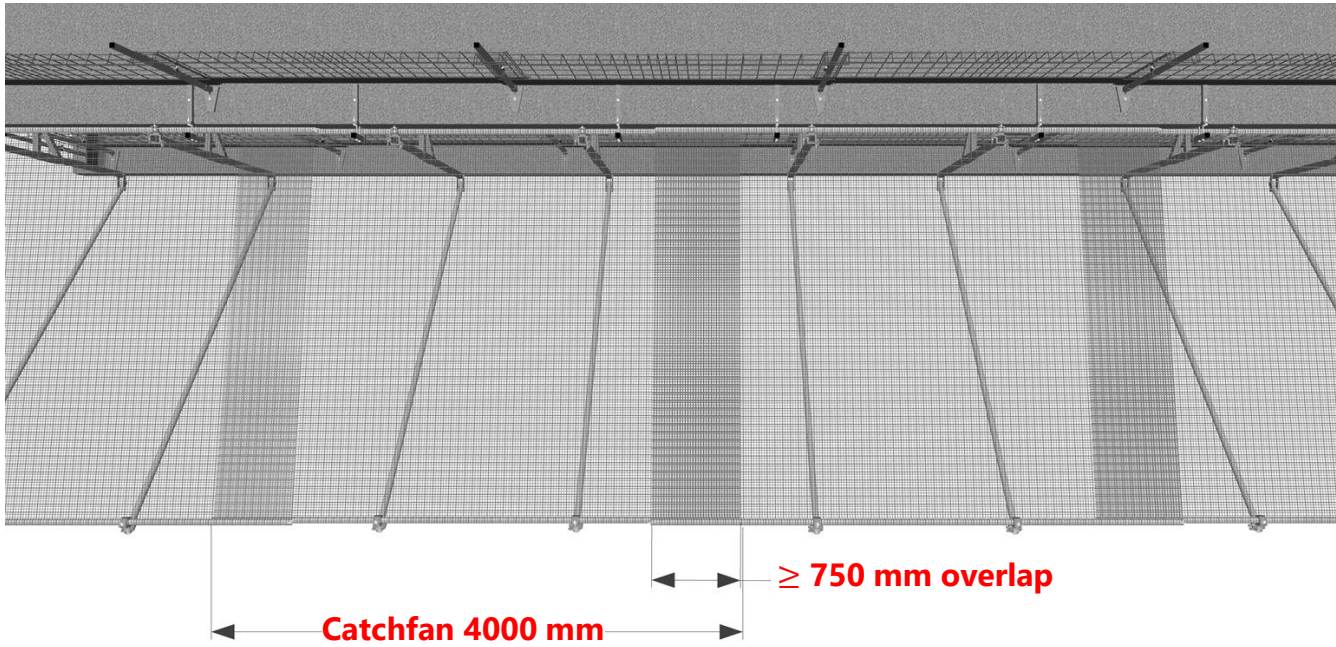


Slab & Wall Fix

Art.-Nr.: 2079606
5 kg

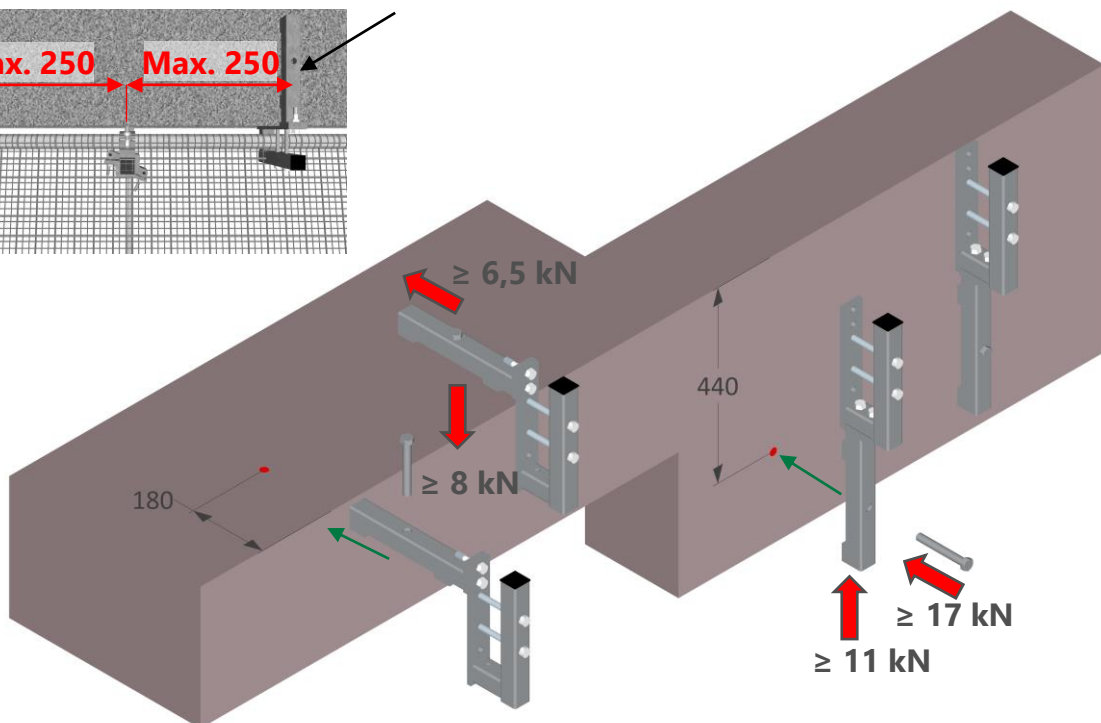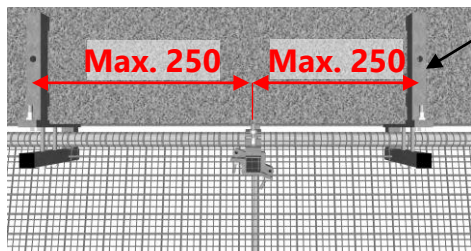
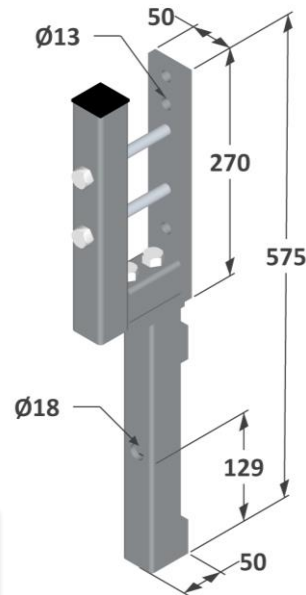
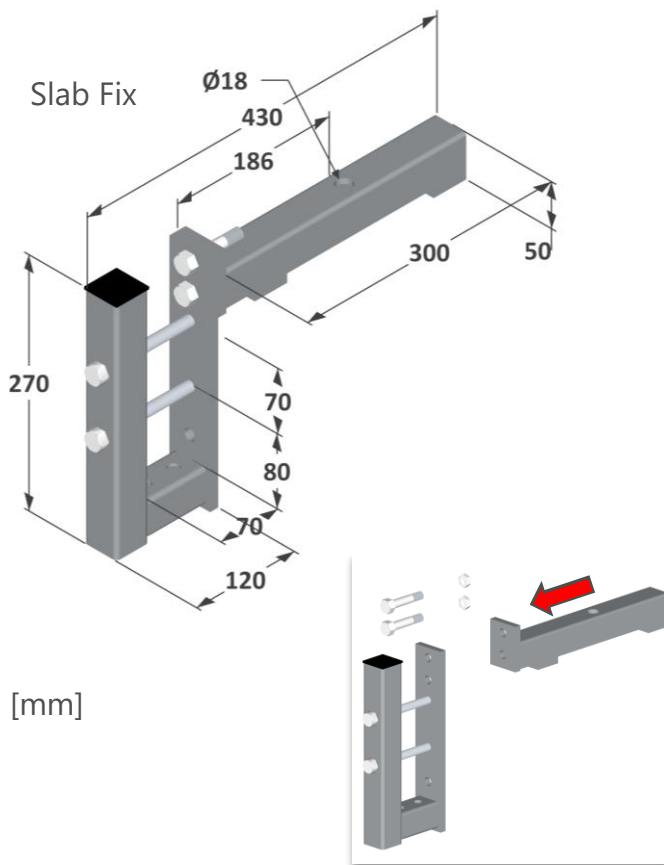


Scaffold Fix

Art.-Nr.: 2079609
4,40 kg

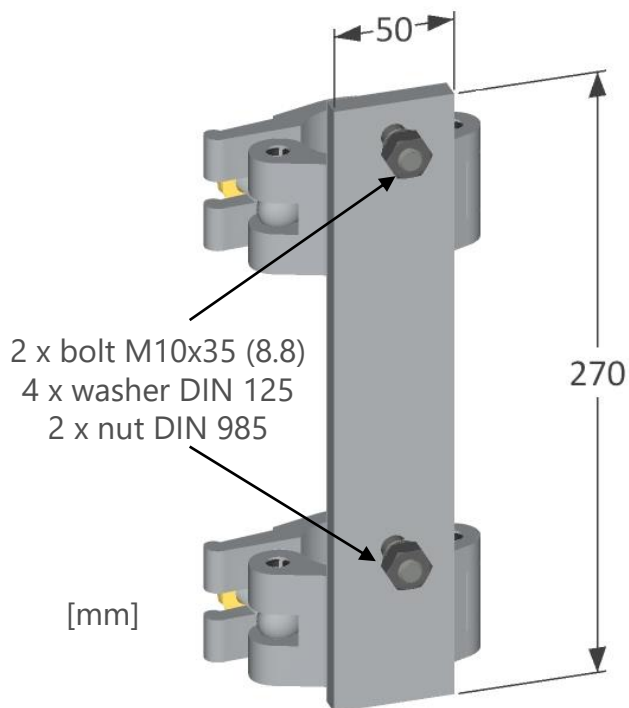


Scaffold fix needs to be connected with the slab/wall fix part!

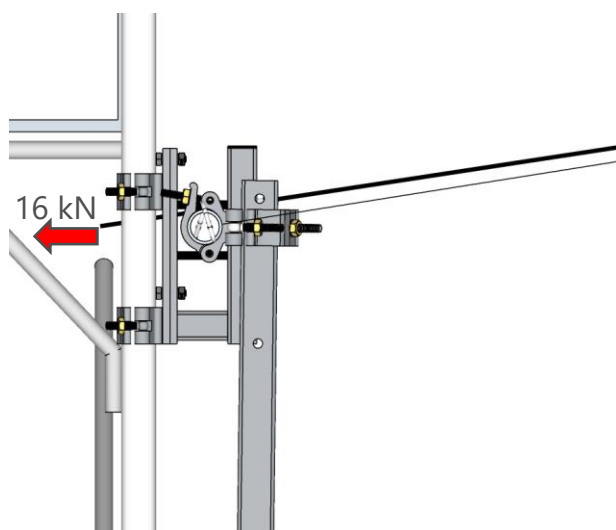
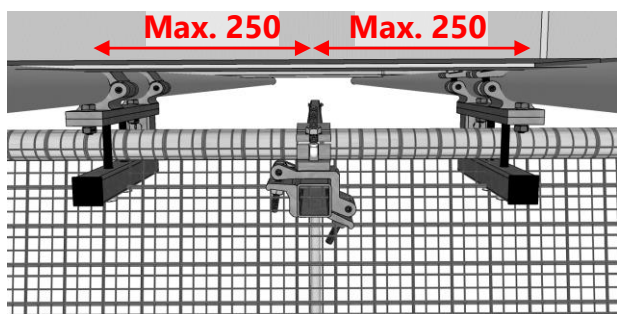
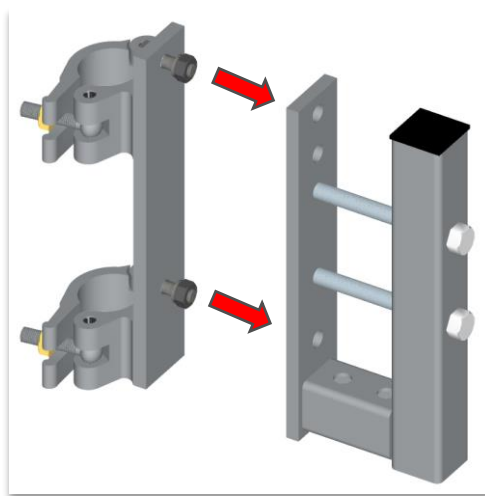


Extension


Art.-Nr.: 2079604
6 kg

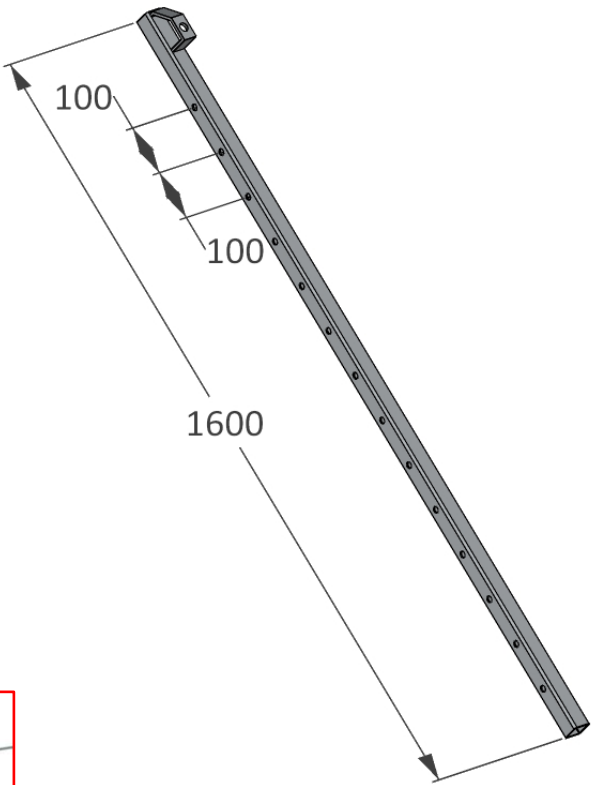

[mm]

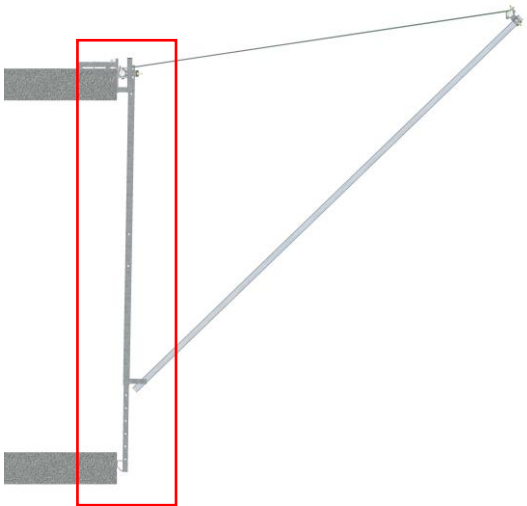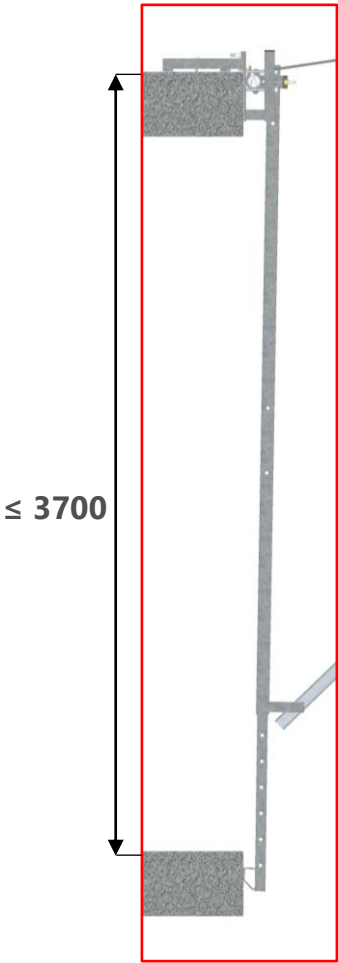

Catchfan assembling overview

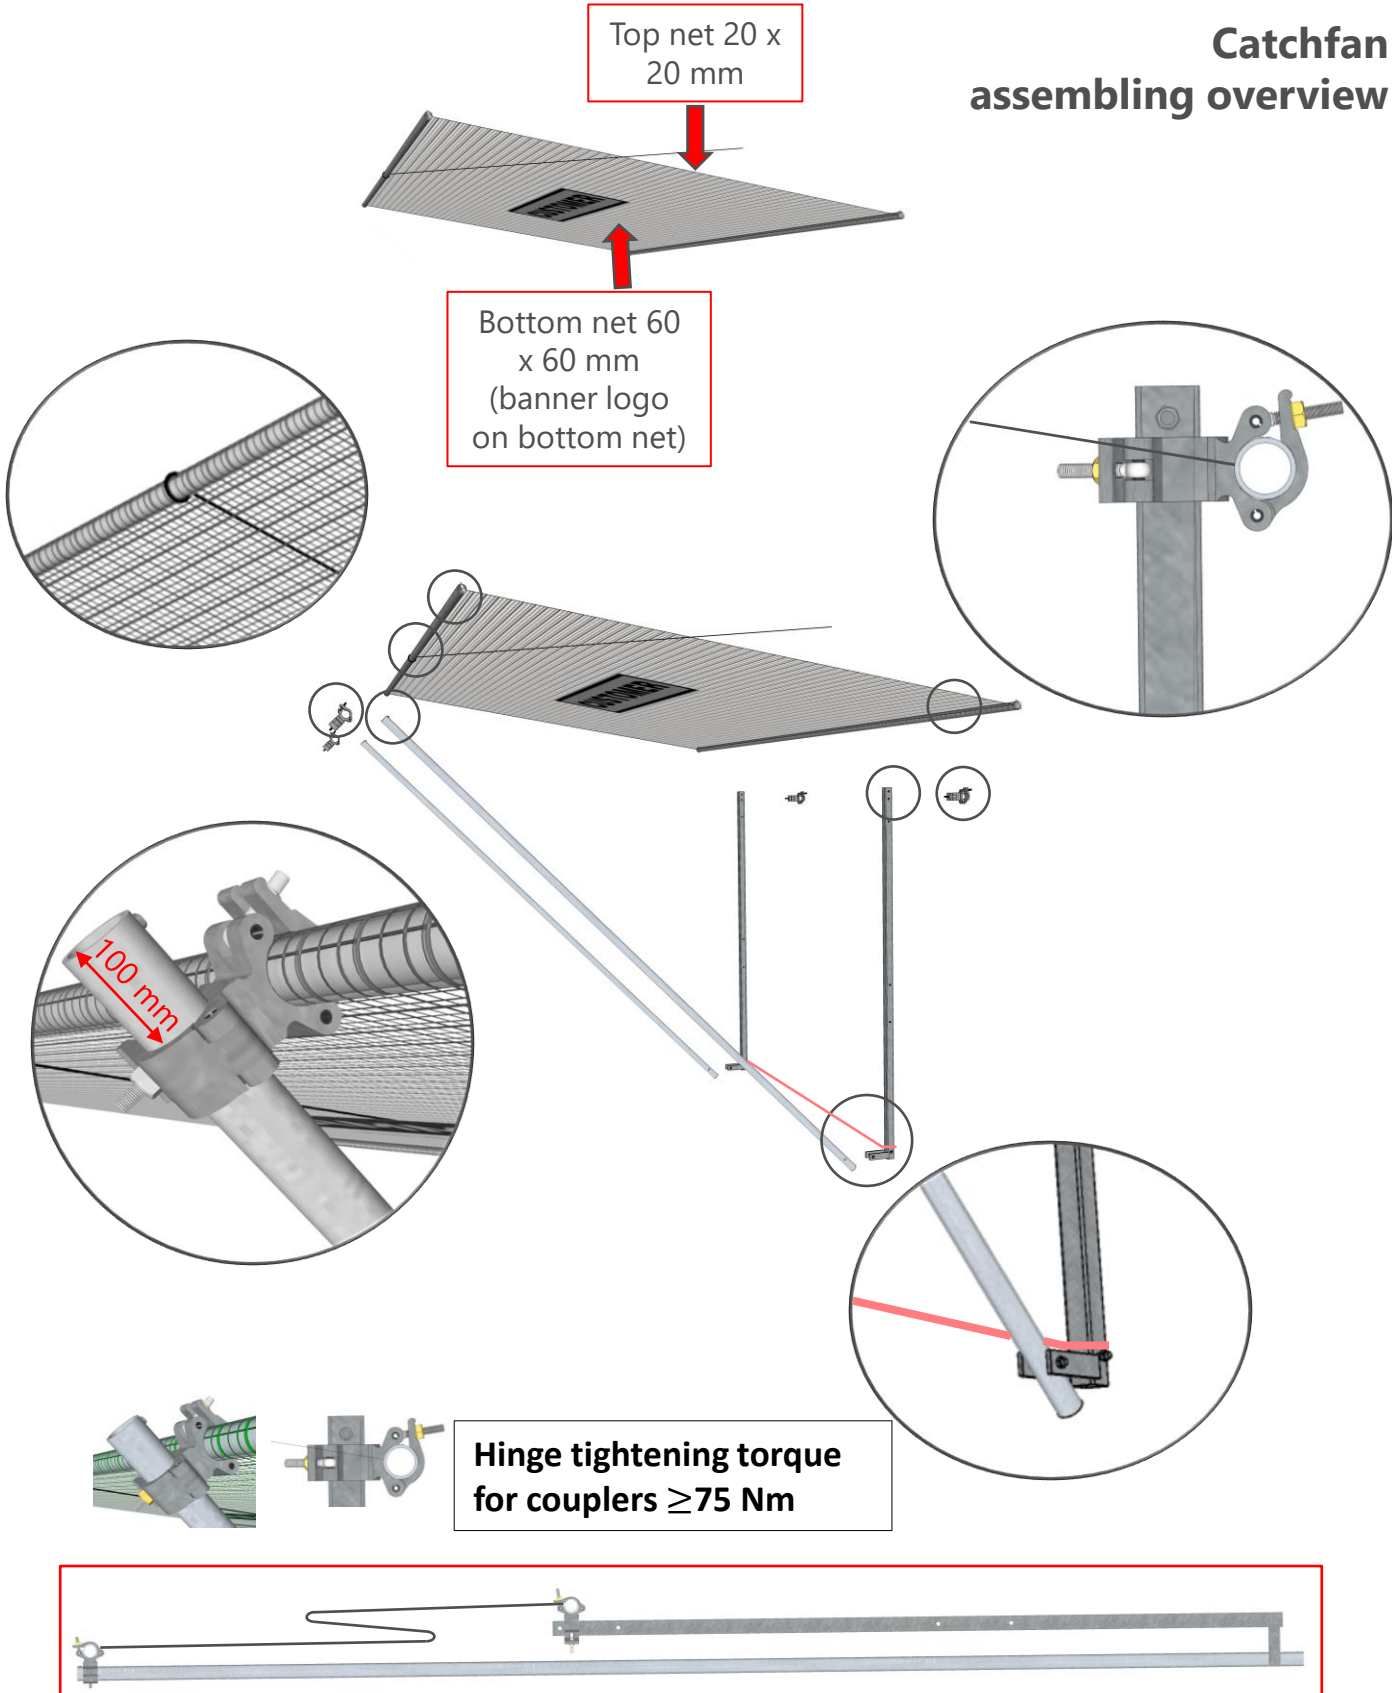

Catchfan assembling overview

①




Catchfan 6m -> 3600 mm
Catchfan 4m -> 1600 mm

②


Top net 20 x 20 mm




Bottom net 60 x 60 mm
(banner logo on bottom net)

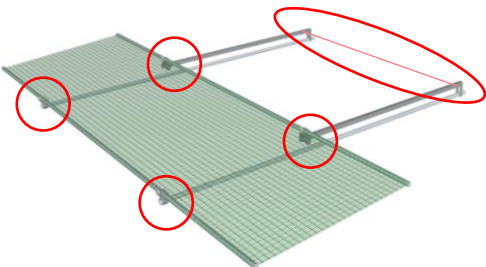


③

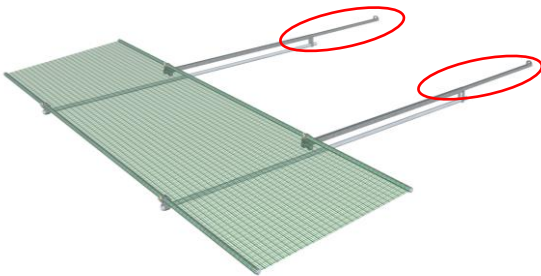


Installation on site

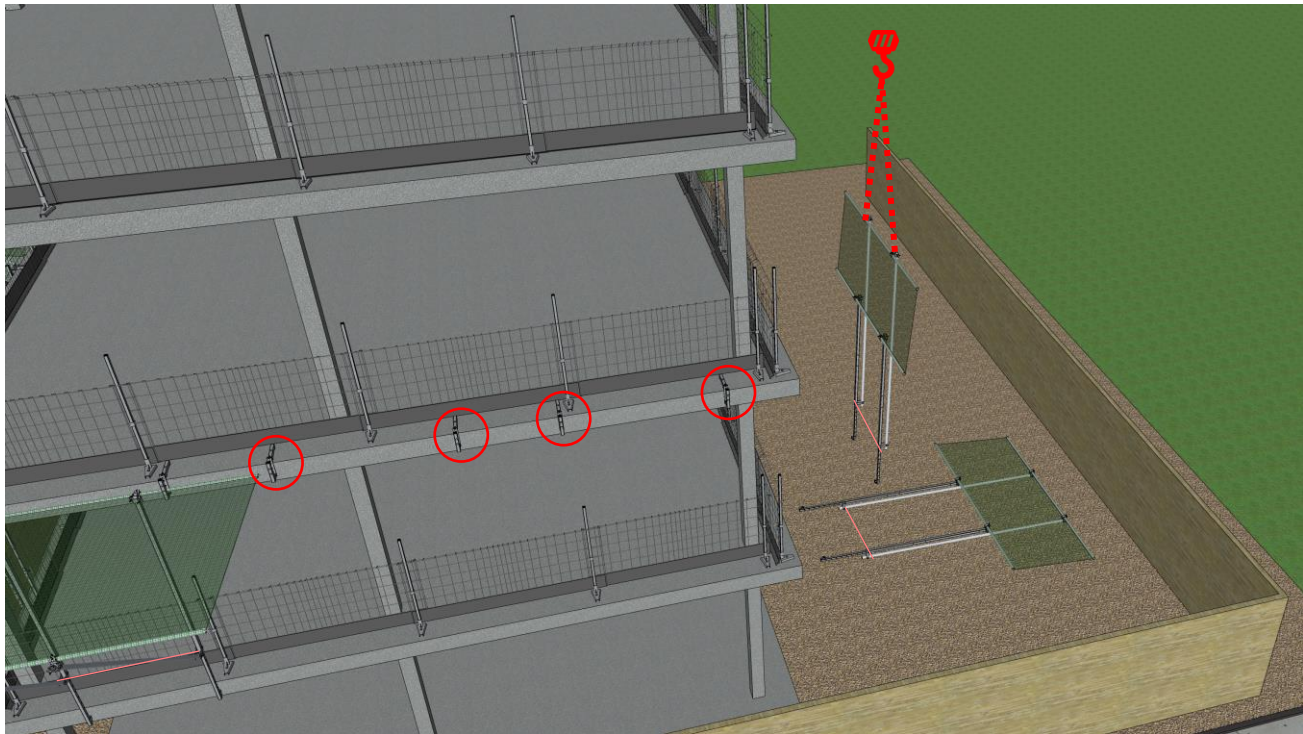

Pre-install the attachment

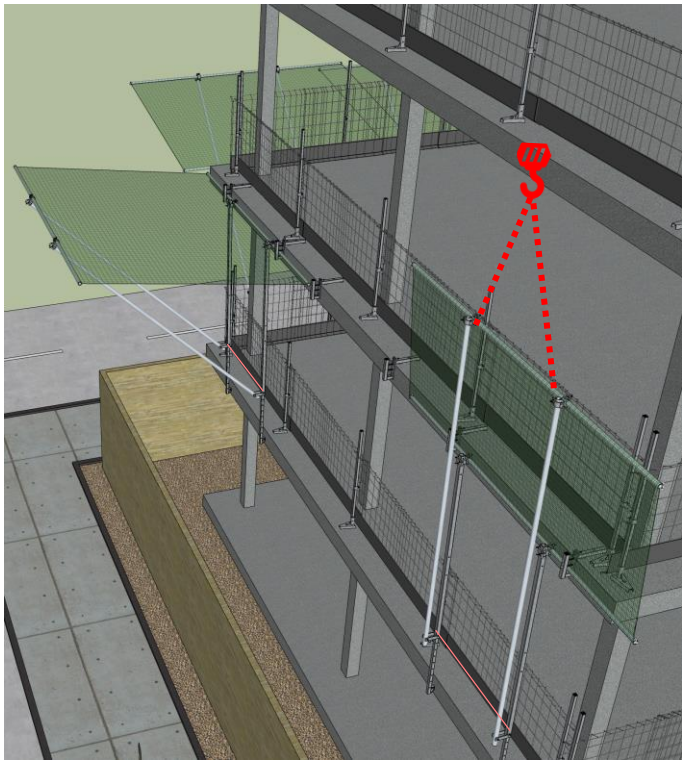


Insert catchfan into attachment & lock it

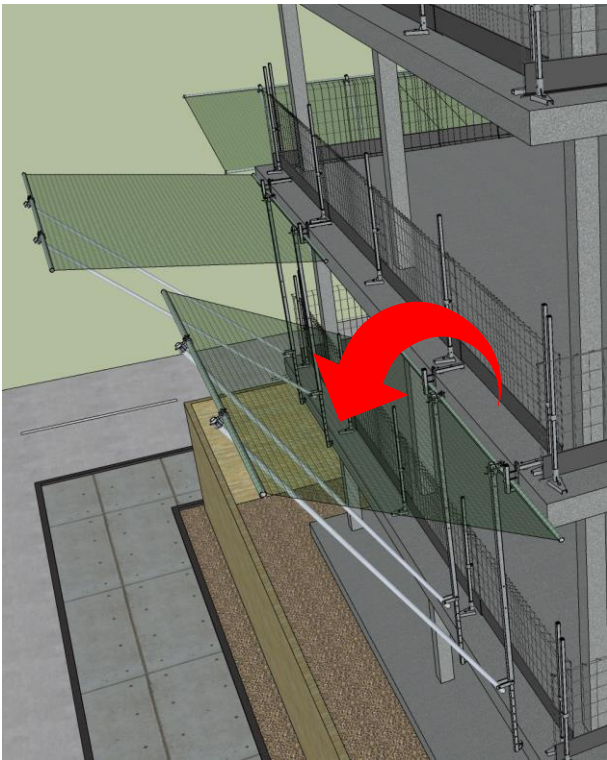


Open catchfan

Installation on site

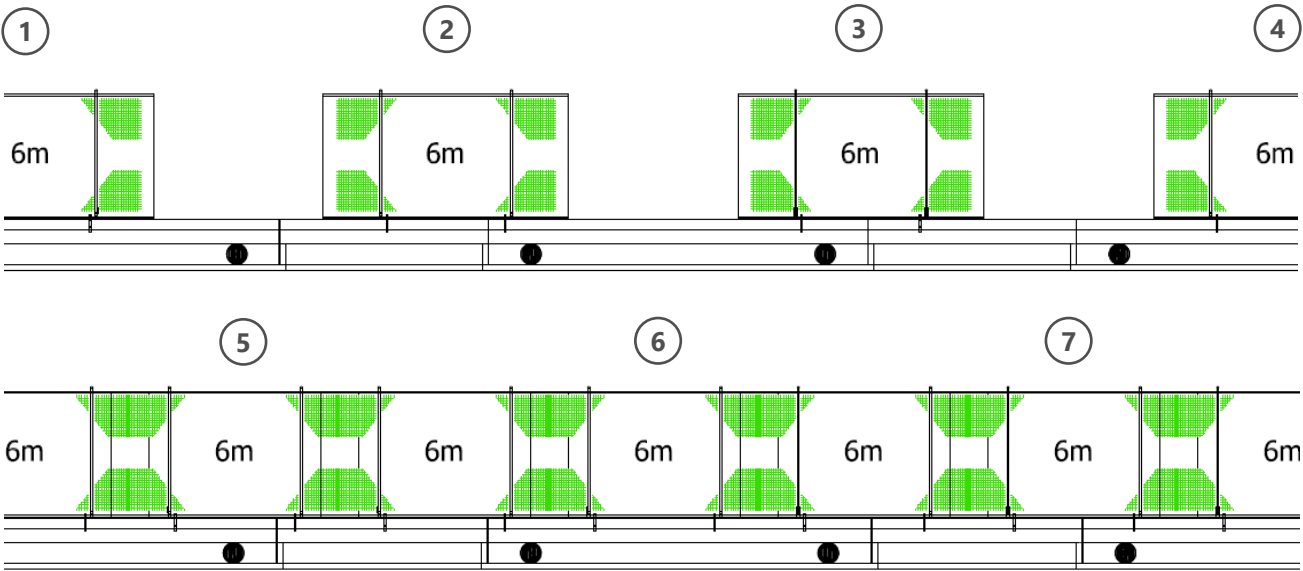

Example of an alternated catchfan installation with 7 pcs catchfan

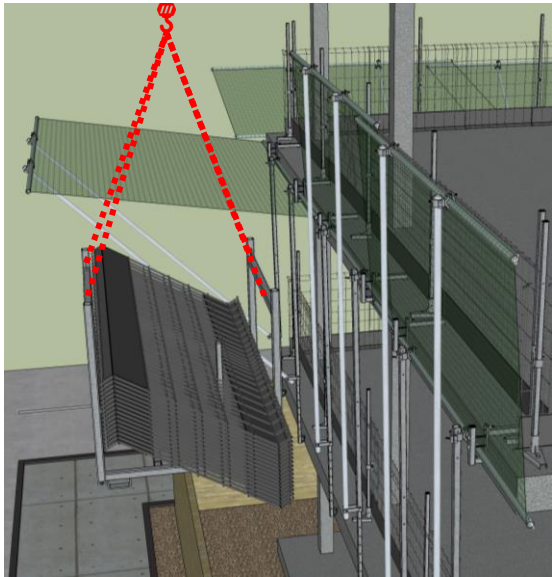


**Fold the catchfan for lifting
material close to the structure**

Packaging and storage

1 Packaging (10 pcs Catchfan 6 m / 4 m) contains of:

- 10 pcs safety net 6 m / 4 m with banner and pull in rope
- 20 pcs round tube 6 m / 4 m
- 20 pcs vertical round tube
- 20 pcs square tube 2,5 m
- 10 pcs body tube strap
- 20 pcs coupler round-round
- 20 pcs coupler round-square

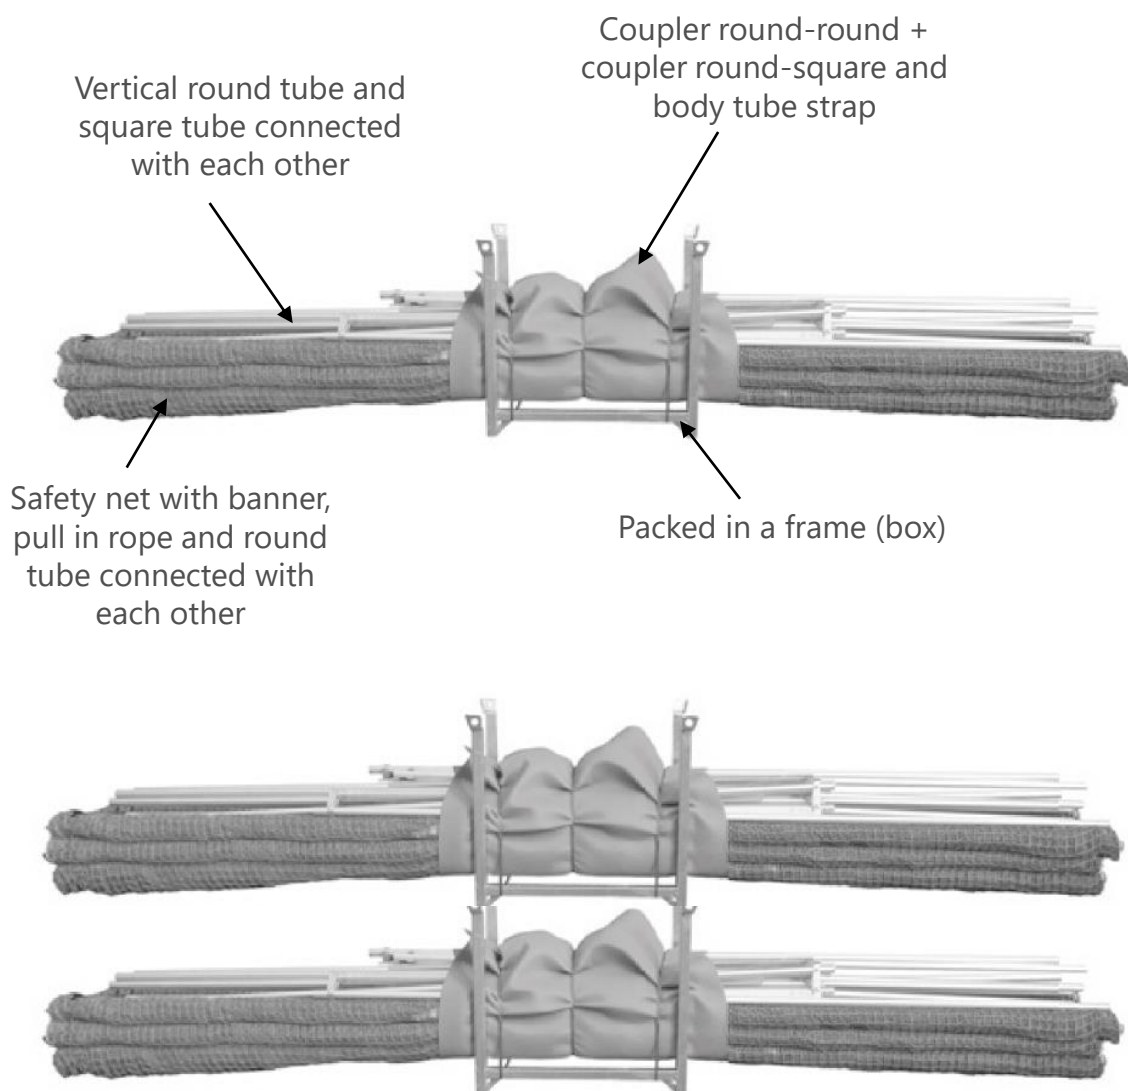

Please store the catchfan clean and dry. Protect the catchfan from UV light.

Tammet Oy
Metallikutomonkatu 1
10600 Tammisaari

www.tammet.fi
info@tammet.fi
+358 201 450 201